




KOYO MANUFACTURING (THAILAND)CO.,LTD.

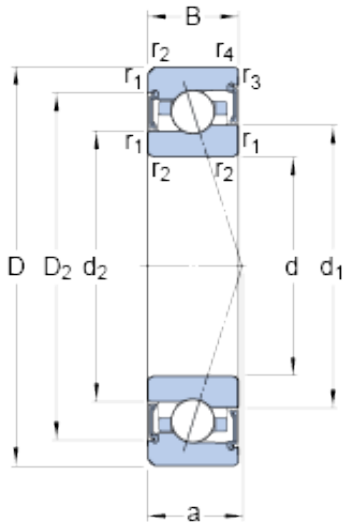

80 mm x 125 mm x 22 mm SKF S7016 CE/HCP4A angular contact ball bearings

Bearing No. S7016 CE/HCP4A

S7016 CE/HCP4A Bearing 2D drawings and 3D CAD models

Size	125x80x22 mm
Bore Diameter	125 mm
Outer Diameter	80 mm
Width	22 mm
d	80 mm
D	125 mm
B	22 mm
d ₁	95.83 mm
d ₂	93 mm
D ₂	112.6 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	24.9 mm
d _a - min.	86 mm
d _a - max.	95.1 mm
d _b - min.	86 mm
d _b - max.	92.3 mm
D _a - max.	119 mm
D _b - max.	120.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	33.8 kN
Basic static load rating - C ₀	28 kN
Fatigue load limit - P _u	1.2 kN



KOYO MANUFACTURING (THAILAND)CO.,LTD.

Limiting speed for grease lubrication	17500 r/min
Ball - D_w	11.112 mm
Ball - z	25
Calculation factor - f_0	9.4
Preload class A - G_A	180 N
Preload class B - G_B	550 N
Preload class C - G_C	1090 N
Calculation factor - f	1.1
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.05
Calculation factor - f_{HC}	1.01
Preload class A	80 N/micron
Preload class B	127 N/micron
Preload class C	174 N/micron
d_1	95.83 mm
d_2	93 mm
D_2	112.6 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	86 mm
d_a max.	95.1 mm
d_b min.	86 mm
d_b max.	92.3 mm
D_a max.	119 mm
D_b max.	120.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	33.8 kN



KOYO MANUFACTURING (THAILAND)CO.,LTD.

Basic static load rating C_0	28 kN
Fatigue load limit P_u	1.18 kN
Attainable speed for grease lubrication	17500 r/min
Ball diameter D_w	11.112 mm
Number of balls z	25
Preload class A G_A	180 N
Static axial stiffness, preload class A	80 N/ μ m
Preload class B G_B	550 N
Static axial stiffness, preload class B	127 N/ μ m
Preload class C G_C	1090 N
Static axial stiffness, preload class C	174 N/ μ m
Calculation factor f	1.1
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1.01
Calculation factor f_0	9.4
Mass bearing	0.81 kg